


# Single Localizer

## Technical Information

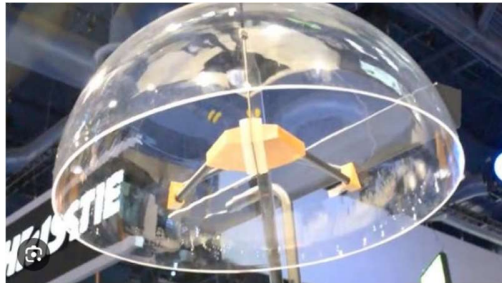

### Overview

Model for one listener. Perfect for maximum audio focus.

### Installation Options

PoleMount System applications requiring

### Mounting Height Options

Provides 80% drop-off from sweet *From floor to bottom edge of spot under dome to sound heard dome:*

just outside dome's edge.

Gold standard for audio isolation 6.5\* or 7.5 feet (2 or 2.3m) and stereo quality sound.

### Isolation

14 dB

### Sitting listener

### Standing listener

7.5\*, 8 or 9 feet (2.3, 2.4, or 2.7m)


### Stereo Separation

10 dB

\*Recommended mounting height

### Listening Region

30"H x 12"W x 12"D  
(0.8m x 0.3m x 0.3m)



### Amplifier Minimum:

1 watts continuous per channel Maximum:

50 watts peak per channel

### Input Impedance

6 Ohms

### Physical Dimensions

Diameter: 32" (.8m)

Height: 16" (.4m)

### Sensitivity

102dB SPL 1 watt, 1 meter@ 1kHz

### Weight

17lbs. (7.7kg)

### Frequency Response

150 Hz – 20KHz +/- 2bB\*

Shipping Weight: 18lbs. (8.2kg)